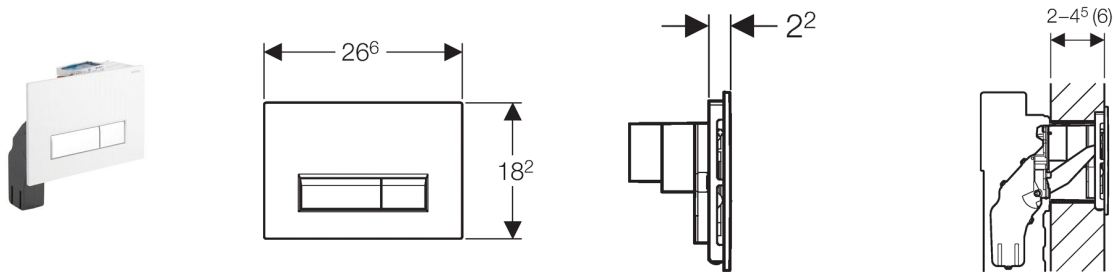


Geberit actuator plate Sigma40 for dual flush with integrated odour extraction

Application purpose

- For dual flush
- For use with Geberit Sigma cistern 12 cm (UP320) with connection for odour extraction unit with filtration
- For front actuation
- For direct odour extraction from the WC ceramic appliance
- For odour neutralisation through an active carbon filter
- For installation in installation walls with up to 6 cm covering thickness (with extension set)
- For adding in-cistern blocks without chlorine or oxidising components

Characteristics

- Odour extraction unit with filtration integrated in the concealed cistern
- Ventilation and control unit with radial fan, can be installed without tools
- LED display for filter replacement
- Odour neutralisation with active carbon filter
- Push-button for switching the odour extraction unit on and off
- Automatic switching off of the odour extraction unit after a predefined running time
- Tool-free replacement of the active carbon filter
- Tool-free insertion of in-cistern blocks

Technical data

Actuation force	< 20 N
Product material	plastic/aluminium-plastic composite
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Power consumption	3 W
Air volume flow rate odour extraction unit	8,5 m ³ /h

Scope of delivery

- Mounting frame with swivelling mechanism
- 2 distance bolts
- 2 actuator rods
- Ventilation and control unit
- Power supply unit with LED display
- Cable connection with plug
- Active carbon filter type 1
- Protection cover
- Receptacle for in-cistern blocks
- Moisture protection on conduit pipe

Article

Article no.	Colour
115.600.KQ.1	white alpine
115.600.KR.1	jet black RAL 9005