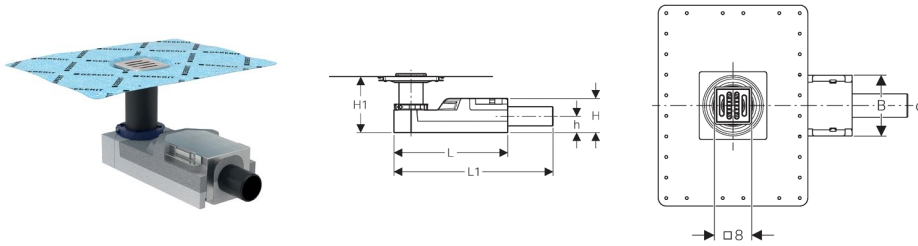


Geberit floor drain for floor-even shower, floor construction height from 90 mm

NEW


Application purpose

- For drainage of floor-even showers
- For floor constructions 90–200 mm
- For composite seals

Characteristics

- Quality-monitored in accordance with EN 1253-3
- Minimum screed height at inlet 90 mm
- Tile structure floor 2–40 mm
- Sealing fleece, pre-mounted, 10 cm circumferential, for connecting sealing systems
- Grating made of stainless steel
- Grating can be aligned in height, inclination and offset
- Base unit made of EPS, for sound decoupling and receiving the trap

Technical data

Depth of water seal 50 mm

Scope of delivery

- Protection box cover with reference line
- Thin bed bonding flange
- Comb insert
- Grating frame with compensation ring
- Grating
- Trap made of PE-HD
- Fastening material

Article

Art. no.	DN	d, \emptyset [mm]	B [cm]	H [cm]	H1 [cm]	h [cm]	L [cm]	L1 [cm]
154.050.00.1	50	50	13	9	9-20	4.2	30	35.8

Accessories

- Grating, round, 8 x 8 cm
- Grating, square, 8 x 8 cm