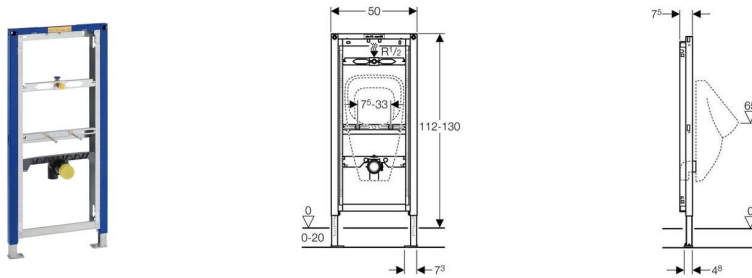


Geberit Duofix element for urinal Universal, H112 - 130, exposed flushing valve

Application purpose

- For installation in room-height prewall or partition wall
- For installation in drywall or prewall construction covered with panels (gypsum or wood)
- For installation in front of a solid or drywall
- For installing urinals
- For a floor construction of 0 - 20 cm
- For exposed flush valve

Characteristics

- Frame with dia. 9 mm drilling holes for fastening in wood frame construction
- Self-supporting
- Feet galvanized, infinitely adjustable 0 - 20 cm
- Rotating foot plate, for installation in UW 50 and UW 75 U wall profiles
- Feet can be retracted 5 cm
- Powder-coated frame, ultramarine blue
- Element height 112 cm, adjustable up to 130 cm, depending on urinal
- Fastening for ceramic appliances, adjustable height and distance
- Fastening for outlet bend height-adjustable and sound absorbing
- Fastening for flush pipe Rp 1/2" height and sides adjustable
- Self-locking feet for tool-free alignment of the element

Scope of delivery

- Water supply connection R 1/2"
- Connection set for urinal with trap
- Rubber collar dia. 44/32 mm
- Connection bend HDPE reduced, dia. 63 mm to dia. 50 mm, with seal for urinal trap
- Rubber collar dia. 57/50 mm
- 2 threaded rods M8 for ceramics fastening
- Fastening material

Excluded:

- Urinal flushing system

Article

Article no.	Description
111.686.00.1	Geberit Duofix element for urinal Universal, H112 - 130, exposed flushing valve