


## Geberit Monolith sanitary module for wall-hung washbasin and wall-mounted tap depth gauge 10 cm, drawer left

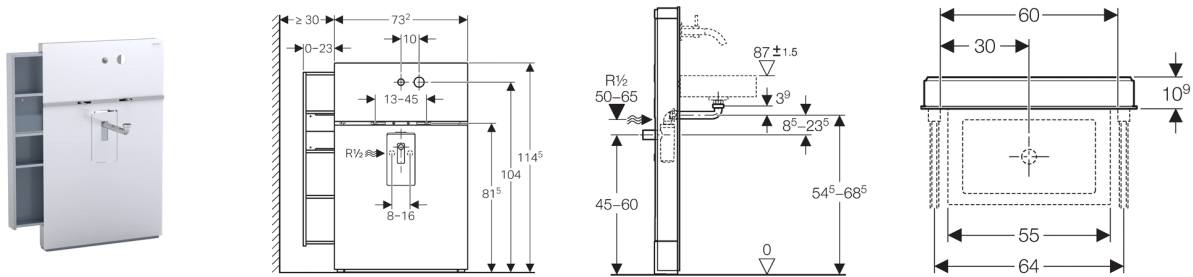

### Application purpose

- For wall-hung washbasins with a width of up to 70 cm
- For wall-hung washbasins, bowl centred, with a width of up to 55 cm, with double towel rail
- For wall-hung washbasins, bowl at the side, with a width of up to 64 cm, with double towel rail
- For replacing wall-hung washbasins
- For mounting on finished floors
- For use in wall inlet connections
- For installation in renovations, conversions and new buildings
- For two-hole taps with 10 cm depth gauge and mixer on the right
- For concealed wall-mounted taps from

### Characteristics

- Sanitary module with front cladding made of toughened safety glass (ESG) and lateral cladding made of brushed aluminium
- Connection to drinking water supply integrated
- Trap with infinitely height-adjustable inlet pipe integrated
- Waste plug infinitely height-adjustable
- Integrated fastening rail for fastening washbasins and double towel rail
- Galvanized leg supports, adjustable, premounted
- Self-supporting
- Compensation of dimensional tolerances
- Wall inlet connection height: 45 - 60 cm from finished floor
- Water supply connection height: 50 - 65 cm from finished floor
- Distance from element centre to angle stop valve 4 - 8 cm
- Trap, hidden
- Washbasin installation height: 82 cm from finished floor
- Washbasin fastening distance 13 - 31 cm, enlargeable to 45 cm
- Wall-mounted tap height: 104 cm from finished floor
- Prepositioned retainer for tap connection to 2-hole wall-mounted taps
- Drawer that can be pulled out at the sides, with mechanical opening support

### Technical data

Height x Width x Depth	114,5 x 73,2 x 10,7 cm
Operating pressure	1 - 10 bar
Maximum operating temperature	80 °C
Maximum operating temperature water, short-term	90 °C

## Scope of delivery

- Washbasin element with front and side cladding
- Fastening material for solid wall
- Extension left with telescopic slide
- Mounting plate for mixer
- Water supply connection set with 2 reinforced braided hoses, 2 connection bends 90° Rp 1/2 and G 3/8 and 2 angle stop valves R 1/2
- Washbasin trap with outlet pipe and union nut G 1-1/4
- 2 outlet pipes (dia. 32 mm and dia. 40 mm)
- Set of seals
- Cover profile for fastening rail

## Article

Article no.	Colour
131.040.SI.1	white glass
131.040.SJ.1	black glass
131.040.SQ.1	umber glass